


Heater Hose

CHARACTERISTICS:

Continuous operating temperature - 65°F (-54°C) to +300°F (+150°C). Nylon fiber reinforced. Resistant to coolant additives. Flexfab silicone heater hose is shipped on wooden reels or handy dispenser cartons containing 25' or 50' of hose. For high temperature applications, Nomex® reinforcement is available.

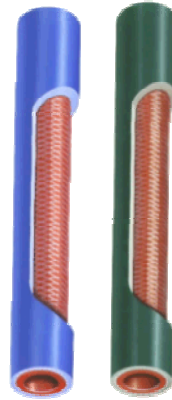

FLX5521 Series - Green																
	INSIDE DIAMETER				OUTSIDE DIAMETER				BURST PRESSURE						WEIGHT	
									5521		SAE J20 R1		TMC			
	INCH	mm	MAX.	MIN.	INCH	mm	MAX.	WALL THICKNESS	PSI	BARS	PSI	BARS	PSI	BARS	LB/ft	Kg/m
5521-025	1/4	6	.270	.230	.640	15	.710	.170/.220	475	32.8	475	32.8	125	8.6	.121	.180
5521-038	3/8	10	.395	.355	.765	19	.835	.170/.220	475	32.8	475	32.8	125	8.6	.181	.289
5521-050	1/2	13	.520	.480	.890	23	.960	.170/.220	425	29.3	425	29.3	125	8.6	.226	.336
5521-062	5/8	16	.645	.605	1.015	26	1.085	.170/.220	375	25.9	375	25.9	125	8.6	.258	.384
5521-075	3/4	19	.770	.730	1.140	29	1.210	.170/.220	325	22.4	325	22.4	125	8.6	.301	.448
5521-100	1	25	1.020	.970	1.390	35	1.460	.170/.220	300	20.7	300	20.7	125	8.6	.391	.58
5521-125	1 1/4	32	1.270	1.220	1.640	42	1.710	.170/.220	275	19.0	275	19.0	125	8.6	.491	.731

Specifications for reference only. Specific test data available on request.

Contact factory for availability of other sizes.

Meets SAE 20R3 Class A Specification. Meets TMC-RP303B Class I Grade 1 Specification.

FLX5596 Series reinforced extruded hose is available with Kevlar® aramid.

FLX5526 Series - Blue																
	INSIDE DIAMETER				OUTSIDE DIAMETER				BURST PRESSURE						WEIGHT	
									5526		SAE J20 R3		TMC			
	INCH	mm	MAX.	MIN.	INCH	mm	MAX.	WALL THICKNESS	PSI	BARS	PSI	BARS	PSI	BARS	LB/ft	Kg/m
5526-025	1/4	6	.270	.230	.580	15	.690	.140/.170	250	17.2	250	17.2	125	8.6	.111	.165

5526-038	3/8	10	.400	.360	.705	18	.720	.140/.170	250	17.2	250	17.2	125	8.6	.145	.217
5526-050	1/2	13	.520	.480	.830	25	.840	.140/.170	250	17.2	250	17.2	125	8.6	.181	.269
5526-062	5/8	16	.645	.605	.955	26	.970	.140/.170	250	17.2	250	17.2	125	8.6	.216	.341
5526-075	3/4	19	.770	.730	1.080	27	1.090	.140/.170	200	13.8	200	13.8	125	8.6	.250	.372
5526-100	1	25	1.020	.970	1.330	35	1.400	.140/.170	175	12.1	175	12.1	125	8.6	.145	.217
5526-125	1 1/4	32	1.270	1.220	1.580	40	1.650	.140/.170	175	12.1	175	12.1	125	8.6	.385	.572

Specifications for reference only. Specific test data available on request.

Contact factory for availability of other sizes.

Meets TMC-RP303B Class I Grade 2 Specification