

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE ODDES SPECIFIED IN THE SOLICITATION: MIL-N-25027

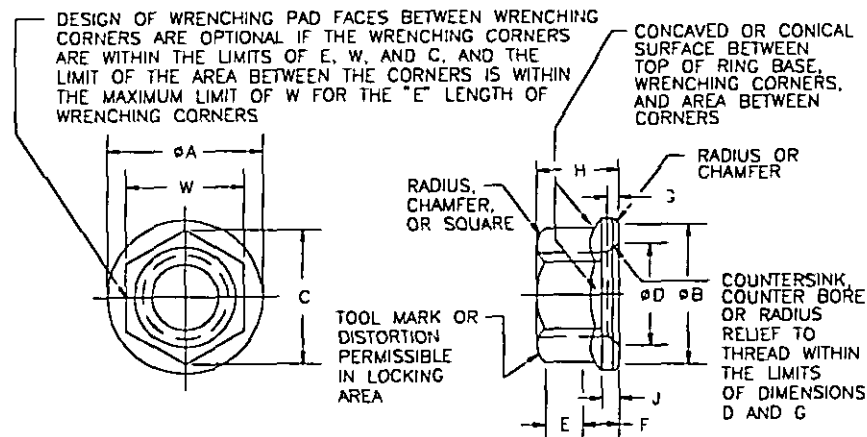


TABLE I

SIZE DASH NO.	(a) THREAD	#A MAX	#B MIN	C MIN	#D		(d) E F		G		H		J MIN	(c) W		(b) X	(f) WRENCHING TORQUE IN LBS	(g) AXIAL STRENGTH LBS MIN	WT LBS/100 MAX
					MAX	MIN	MIN	MIN	MAX	MIN	MAX	MIN		MAX	MIN				
04	4-40 UNJC-3B	.206	.176	.171	.142	.112	.050	.028	.027	.005	.125	.103	.010	.158	.150		11	755	.050
06	6-32 UNJC-3B	.244	.214	.207	.168	.138	.055	.039			.141	.115		.190	.181		17	1,136	.080
08	8-32 UNJC-3B	.290	.260	.244	.194	.164	.060	.041	.031	.006	.125	.103	.015	.221	.213	.003	23	1,720	.150
3	10-32 UNJF-3B	.330	.290	.277	.220	.190	.065	.043			.188	.154		.252	.243		46	2,460	.180
4	1/4-28 UNJF-3B	.420	.386	.347	.280	.250	.090	.057	.036	.007	.219	.204	.019	.316	.304		115	4,580	.350
5	5/16-24 UNJF-3B	.520	.482	.419	.342	.312	.120	.077	.042	.008	.266	.251	.250	.378	.367	.004	260	7,390	.600
6	3/8-24 UNJF-3B	.620	.575	.491	.405	.375	.125	.089			.282	.267	.030	.440	.430		450	11,450	.800

- (a) THREADS PER MIL-5-8879.
- (b) BEARING SURFACE SHALL BE SQUARE WITH PITCH DIAMETER WITHIN ".X" WHEN MEASURED IN ACCORDANCE WITH MIL-N-25027.
- (c) DIMENSIONS ACROSS FLATS INCLUDE DEFORMATION OF SELF-LOCKING ELEMENT.
- (d) MINIMUM LENGTH OF EACH WRENCHING CORNER.
- (e) MINIMUM DISTANCE FROM THE WASHER FACE OF THE NUT TO THE BEGINNING OF THE MINIMUM LENGTH OF "E" OF EACH WRENCHING CORNER.
- (f) NUTS SHALL BE TESTED FOR WRENCHING TORQUE BY USING A BOX OR SOCKET WRENCH.
- (g) TEST BOLTS SHALL BE 180,000 PSI MINIMUM.

REQUIREMENTS:

- (E) 1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL PER AMS 5525 (A286), AMS 5731 (A286) OR AMS 5732.
- 2. PLATING: SILVER PLATE ALL THREADED SURFACES ON NUT PER AMS 2410. THREADS SHALL SHOW COMPLETE COVERAGE. SILVER PLATING ON ALL OTHER SURFACES OPTIONAL. TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION.
- 3. LUBRICANTS: LUBRICANT FOR SILVER PLATED NUTS SHALL BE SOLUBLE IN CLEANER SPECIFIED IN MIL-N-25027.
- 4. MAGNETIC PERMEABILITY: SHALL BE LESS THAN 2.0 (AIR=1.0) FOR A FIELD STRENGTH = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR MIL-I-17214.
- (E) 5. SURFACE TEXTURE: SURFACE ROUGHNESS SHALL BE NOT GREATER THAN 125 MICROINCHES IN ACCORDANCE WITH ANSI/ASME B46.1.

(E) DENOTES CHANGES

INCH-POUND

PREPARING ACTIVITY: DLA-15	MILITARY SPECIFICATION SHEET	SPECIFICATION SHEET NUMBER
CUSTODIANS: ARMY- AV NAVY- AIR FORCE- 11 DLA-	TITLE	MS21043 30 JUN 94 REV E
REVIEW: AR, ER, MI, OS, SH, 99.	NUT, SELF-LOCKING, 800F, REDUCED HEXAGON, REDUCED HEIGHT, RING BASE, CORROSION RESISTANT STEEL	SUPERSEDING MS21043D 27 SEP 85
USER:		AMSC- N/A FSC-5310
PROJECT NUMBER: 5310-1985		

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODDSS SPECIFIED IN THE SOLICITATION: MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

TABLE II INTERCHANGEABILITY TABLE				
CANCELLED AND INACTIVATED PART NUMBERS				SUBSTITUTIVE PART NUMBERS
NAS 679	NAS 1021	NAS 1022	NAS 1291	
-	-	-	C02	NONE
C04	C04	-	C04	MS21043-04
C06	C06	C06	C06	MS21043-06
C08	C08	C08	C08	MS21043-08
C3	C3	C3	C3	MS21043-3
C4	C4	C4	C4	MS21043-4
C5	C5	C5	C5	MS21043-5
C6	C6	C6	C6	MS21043-6
C7	-	C7	C7	NONE
-	C7	-	-	SEE MS21046
-	-	C8	C8	NONE
-	C8	-	-	SEE MS21046
-	-	C9	C9	NONE
-	C9	-	-	SEE MS21046
-	-	C10	C10	NONE
-	C10	-	-	SEE MS21046
-	-	C12	-	NONE
-	C12	-	-	SEE MS21046
-	-	C14	-	NONE
-	C14	-	-	SEE MS21046
-	-	C16	-	NONE
-	C16	-	-	SEE MS21046
-	C17	C17	-	NONE
-	-	C18	-	NONE
-	C18	-	-	SEE MS21046
-	-	C20	-	NONE
-	C20	-	-	SEE MS21046

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV NAVY-
AIR FORCE- DLA-
REVIEW: AR, ER, MI, OS, SH, 99.
USER:
PROJECT NUMBER: 5310-1985

MILITARY SPECIFICATION SHEET
TITLE
NUT, SELF-LOCKING, 800F, REDUCED HEXAGON,
REDUCED HEIGHT, RING BASE,
CORROSION RESISTANT STEEL

SPECIFICATION SHEET NUMBER
30 JUN 94
MS21043 REV E
SUPERSEDING
MS21043D 27 SEP 85
AMSC- N/A FSC -5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Page 3 of 3

INCH - POUND

MS21043E
AMENDMENT 1
2 February 1996

MILITARY SPECIFICATION SHEET

NUT, SELF-LOCKING, 800°F, REDUCED HEXAGON, REDUCED
HEIGHT, RING BASE CORROSION RESISTANT STEEL

This amendment forms a part of MS21043E, dated 30 June 1994, and is approved for use
by all Departments and Agencies of the Department of Defense.

PAGE 1, TABLE I, COLUMN J, DASH NUMBER 5

Delete Dimension ".230" and substitute with ".023".

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS

(Project No. 5310-2240)

Review activities:
Army - AR, ER, MI
Navy - OS

AMSC N/A

FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.